


iBoard[®] by APS

PART#: IB-116C&H



iBoard[®]

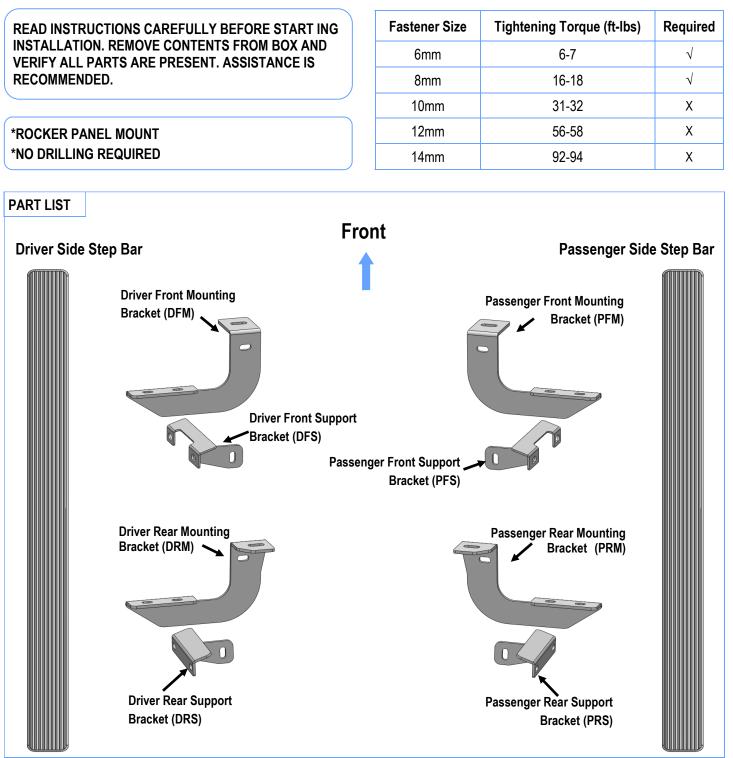


Hardware Package A (For Bracket Installation)											
ltem	QTY	Description	ltem	QTY	Description						
1#	8	M8X1.25-35mm Hex Bolts	5#	8	M6X1-25mm Hex Bolts						
2#	12	M8 Large Flat Washers	6#	16	M6 Large Flat Washers						
3#	4	M8 Lock Washers	7#	8	M6X1 Nylon Lock Nuts						
4#	4	M8X1.25 Nylon Lock Nuts									
			4 #		5#	6 #	7#				

Hardware Package B (For Stainless Steel Step Bar Installation)										
ltem	QTY	Descriptio	on	ltem	QTY	Description				
1#	8	M8X1.25-35mm Carriage Bolts		3#	8	M8 Nylon Lock Nuts				
2#	8	M8 Large Flat Washers		4#	4	Sliders (Packed with Step Bars)				
1 # 2 #			3# 4#							




STEP 1

Start installation from the passenger side front of the vehicle. Assemble the Passenger Front Mounting Bracket (**PFM**) and Passenger Front Support Bracket (**PFS**) as shown, (**Fig 1**). Do not fully tighten hardware at this time.

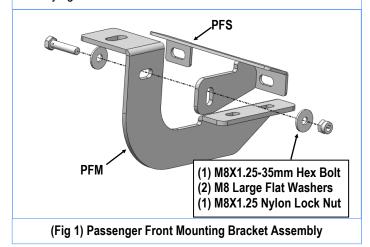


STEP 2

Locate the Passenger Side Front Mounting position on vehicle, there are (2) holes on the pinch weld and (1) threaded hole on the bottom floor, (**Fig 2**).

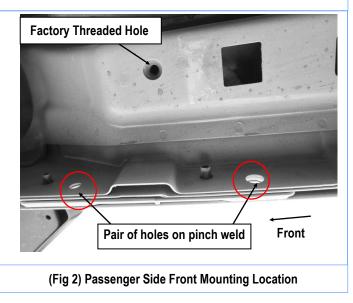

STEP 3


Attach the Assembled Passenger Front Mounting Bracket on the mounting position. Install the Passenger Front Mounting Bracket (**PFM**) on the factory threaded hole with (1) M8X1.25-35mm Hex Bolt, (1) M8 Large Flat Washer and (1) M8 Lock Washer. Install Passenger Front Support Bracket (**PFS**) on the pinch weld with (2) M6X1-25mm Hex Bolts, (4) M6 Large Flat Washers, and (2) M6X1 Nylon Lock Nuts, (**Fig 3**). Do not fully tighten hardware at this time.

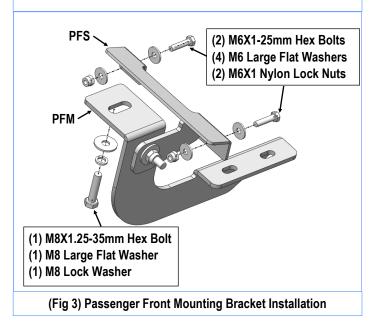

STEP 4

Move to the rear of the vehicle, (Fig 4). Repeat Steps 1-3 to assemble and install the Passenger Rear Mounting Bracket (PRM) and Passenger Rear Support Bracket (PRS), (Figs 5 & 6). Do not fully tighten hardware at this time.



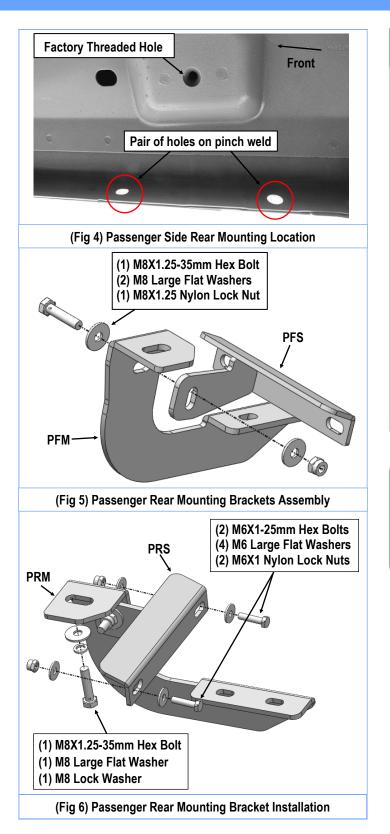

STEP 5

Once all (2) Passenger side mounting brackets are installed, then proceed to the Step Bar installation. (**Figs 7 & 8**)

(1) Select (1) Slider and (2) M8X1.25-35mm Carriage Bolts;

(2) Install (2) M8X1.25-35mm Carriage Bolts in (1) Slider.

(3) Slide the Slider (with carriage bolts) to the Step Bar.

(4) Repeat to install the other (1) slider to the step bar.

(5) Attach the Step Bar (with the Sliders) onto the installed mounting brackets. Position the Sliders to the installed brackets. Secure the Step Bar to the installed Brackets by using (4) M8 Large Flat Washers and (4) M8 Nylon Lock Nuts and (2) Sliders, (**Fig 8**). Do not fully tighten hardware at this time.

Note: The Sliders are packed with the Step Bars.

Level and adjust the Step Bar and fully tighten all hardware. Repeat **Steps 1-5** for the other side Step Bar installation. **The installation is completed!!!**

Attention

Do periodic inspections to the installation to make sure that all hardware is secure and tight.

In order to protect your bars/boards, please use mild soap/non-abrasive products for cleaning only.



(Fig 8) Step Bar Installation