



Hitch Installation Instructions

REV.20260801D



Part#	HT-R39910	Application	Chevrolet S10 / GMC S15 / GMC Sonoma With Roll Pan Bumper
-------	-----------	-------------	---

Hardware List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
Hardware List	1#	Hex Bolts	8	M12X1.75-40	2#	Hex Flange Nuts	8	M12X1.75

Gross Load Capacity When Used As A Weight Carrying Hitch: 3500 LBS. Trailer Weight & 350 LBS. Tongue Weight.
Gross Load Capacity When Used As A Weight Distribution Hitch: 5000 LBS. Trailer Weight & 500 LBS. Tongue Weight.

*****DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.*****

- * Drilling Maybe Required
- * Lower Spare Tire
- * Exhaust Bracket Relocation
- * Trim Roll Pan For Ball Mount
- * Cutting of Roll Pan is Required

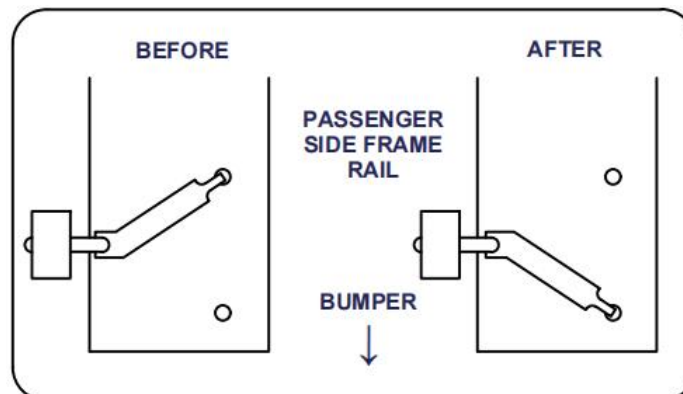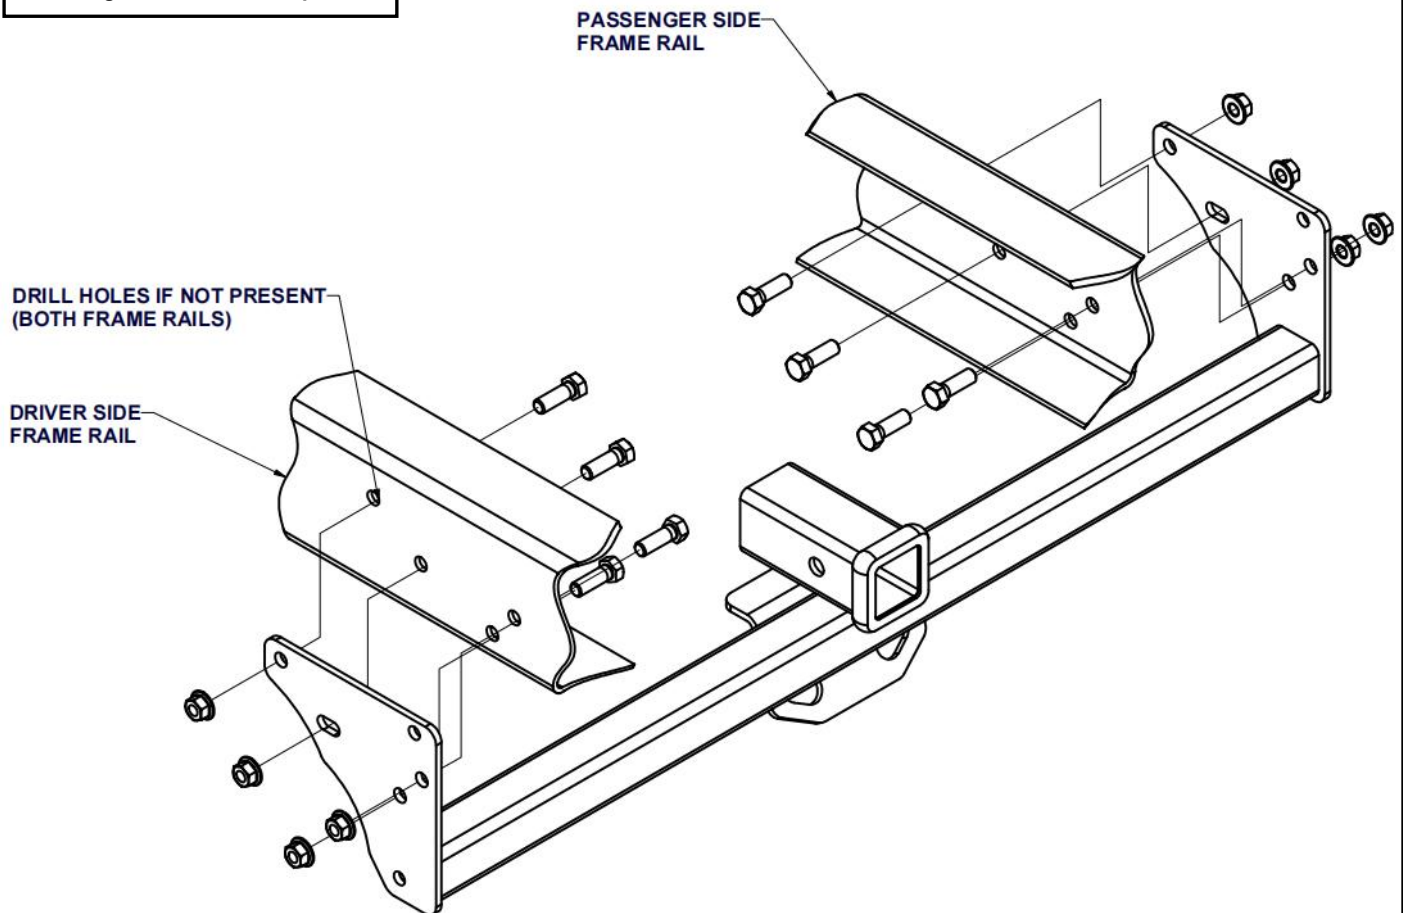

The instructions here are for your reference only. We strongly recommend professional installation for best results. We are not responsible for any damage caused by the installation. Thank you for choosing our product!



Hitch Installation Instructions

Part#	HT-R39910	Application	Chevrolet S10 / GMC S15 / GMC Sonoma With Roll Pan Bumper
Step	Description		
1	Note: Short box models will require relocation of the spare tire. Loosen or remove spare tire as required. Short box models: remove the (2) rear exhaust hanger brackets.		
2	Raise hitch into position and loosely install fasteners as shown above.		
3	Some vehicles may require drilling holes, using a 17/32" drill bit, as shown.		
4	Torque all M12 fasteners to 86 lb-ft.		
5	For ball mount installation, cut the roll pan in the license plate area to provide access. Note: License plate must be repositioned when the ball mount is installed.		
6	Short box models: re-install hanger brackets, rear bracket must be flipped over.		
PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.			

The instructions here are for your reference only. We strongly recommend professional installation for best results. We are not responsible for any damage caused by the installation. Thank you for choosing our product!