



Hitch Installation Instructions


REV.20260601D

Part#	HT-X35710	Application	Ford Explorer Sport Trac All
-------	-----------	-------------	------------------------------

Hardware List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
Hitch Parts	A	Hitch Body	1		B/C	Mounting Brackets	2	B-Driver Side C-Passenger Side
	1#	Hex Nuts	2	M14X2	4#	Hex Flange Nuts	2	M12X1.75
	2#	Carriage Bolts	2	M12X1.75-40	5#	Spacers	2	With Round Hole
HW B (For Hitch Installation)	3#	Spacers	2	With SQ Hole	6#	Hex Bolts	2	M14X2-40
	7#	Hex Bolts	6	M12X1.75-35	9#	Lock Washers	6	M12
	8#	Flat Washers	10	M12	10#	Hex Nuts	4	M12

Gross Load Capacity When Used As A Weight Carrying Hitch: 5000 LBS. Trailer Weight & 500 LBS. Tongue Weight.
Gross Load Capacity When Used As A Weight Distribution Hitch: 6000 LBS. Trailer Weight & 600 LBS. Tongue Weight.
*****DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.*****

* No Drilling Required

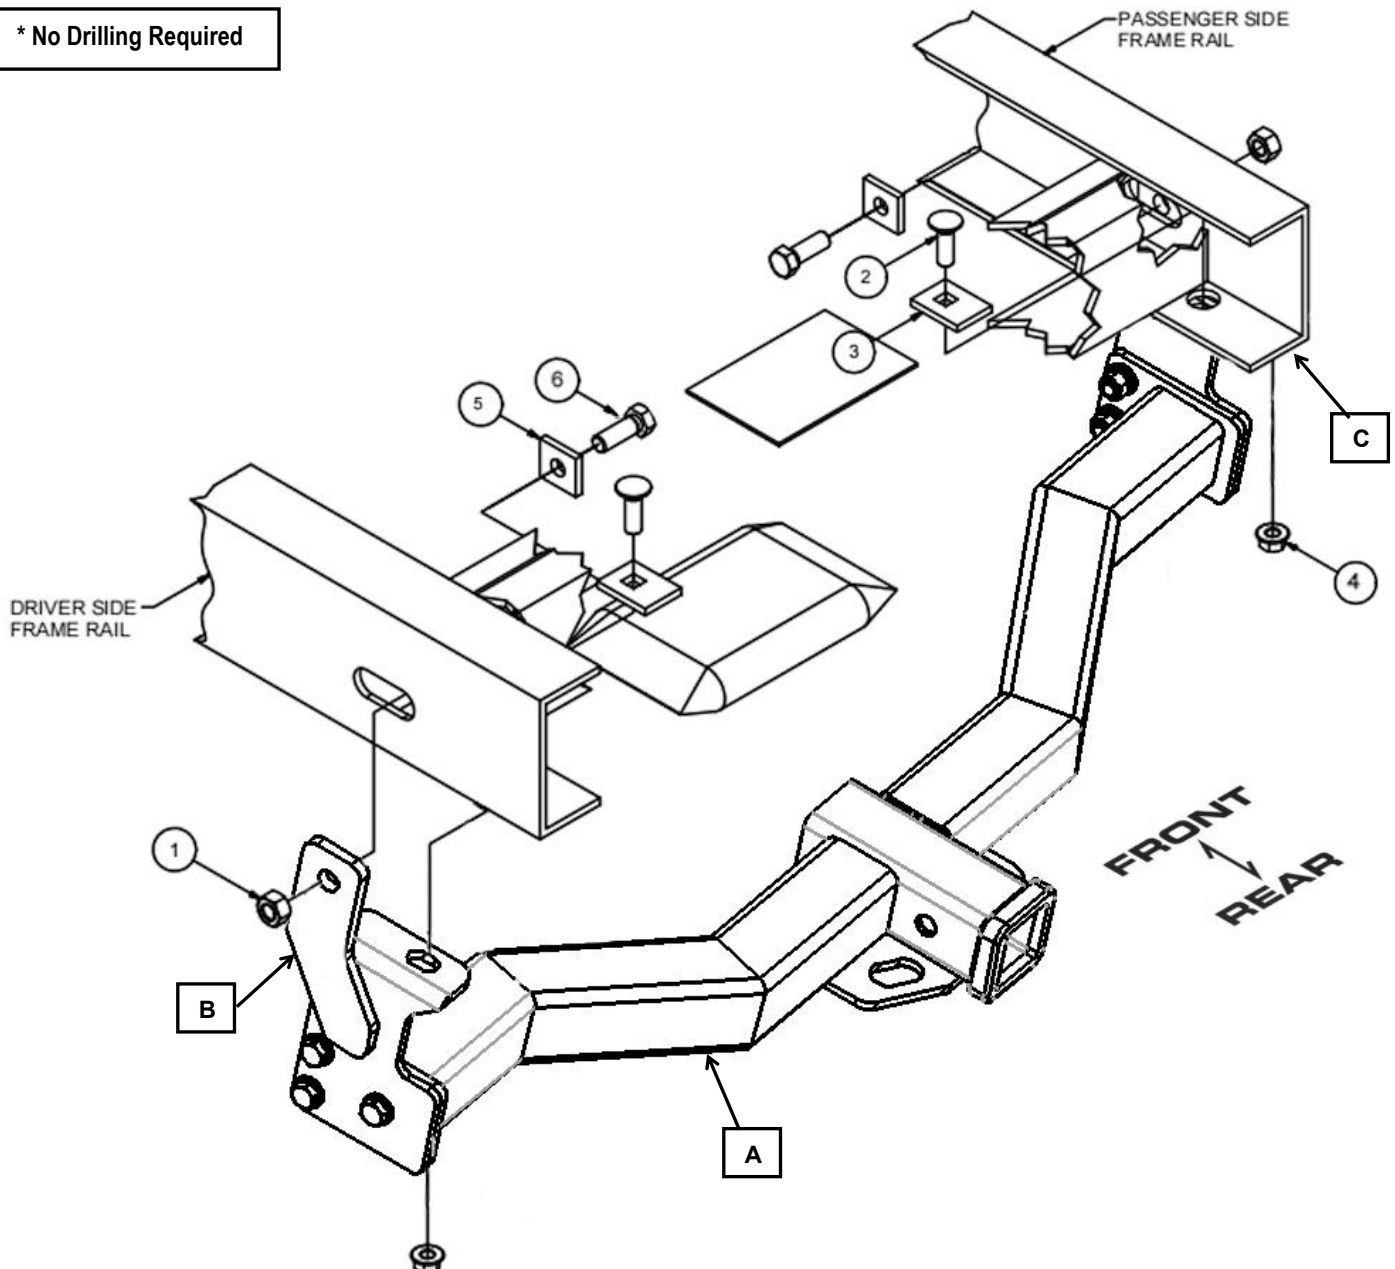

The instructions here are for your reference only. We strongly recommend professional installation for best results. We are not responsible for any damage caused by the installation. Thank you for choosing our product!



Hitch Installation Instructions

Part#	HT-X35710	Application	Ford Explorer Sport Trac All
Step	Description		
1	Assemble Hitch Body (A) and Mounting Brackets (B, C) with (6) M12X1.75-35mm Hex Bolts, (10) M12 Flat Washers, (6) M12 Lock Washers, (4) M12 Hex Nuts. (Hardware in “HW A”). Note: Finger tighten only. Do not fully tighten at this time.		
2	Raise side plates into position under vehicle, placing upright bars against outboard vertical surface of frame. Align hole in the side arm with existing slot in the frame on both sides. NOTE: If present, relocate wires on driver side of the vehicle to install hitch side plate.		
3	Loosely install hitch-to-frame fasteners as shown.		
4	Torque M12 Carriage Bolts to 58 lb-ft and other M12 fasteners to 86 lb-ft. Torque all M14 fasteners to 140 lb.-ft.		
***Periodically Check The Receiver Hitch To Ensure That All Fasteners *** Are Tight & All Structural Components Are Sound.			

The instructions here are for your reference only. We strongly recommend professional installation for best results. We are not responsible for any damage caused by the installation. Thank you for choosing our product!